

Osijek Lighted Mirror

Product Specifications: Hospitality

ZHUOTAI SANITARY WARE CO.,LTD.



PRODUCT DESCRIPTION

Storied past meets exhilarating present in the prestigious Osijek. With sleek lines reflecting strength, grace, and elegance, this top-performing lighted mirror is the fixture to bet on for a winning design

SPECIFICATION STATEMENT

Solution shall consist of a lighted mirror with forward-facing task lighting and 480-hour CASS-tested, lead-free, copper-free, corrosion-resistant glass. Mirror shall have uniform light output in frosted areas using dimmable, high-density (44 LEDs/foot), replaceable LED strips with 90+ CRI (Color Rendering Index) and delivering 853 initial lumens/foot with an efficacy of 140 lumens/watt. Product will be made in China with best quality components and have a 5-year limited warranty.

THE ZHUOTAI MIRROR ADVANTAGE

- ✓ 22 years of mirror knowledge and expertise
- ✓ 10,000pcs installations every month
- ✓ Premium quality you can buy with full confidence
- ✓ Lowest total cost of ownership
- ✓ Quick and professional customer service support
- ✓ 25,000-square-meter China manufacturing facility

LIGHTING FEATURES AND BENEFITS

- Industry-leading lumen output for better task lighting
- Superior color rendering (CRI) for more natural, flattering, and softer light quality
- High-density linear LED design for even light distribution
- High-efficiency LEDs for best-in-class energy savings
- Forward-facing task lighting for ideal makeup application and grooming

GENERAL FEATURES AND BENEFITS

- Corrosion-resistant, 480-hour CASS-tested proprietary mirror glass
- Environmentally-leading, lead-free, copper-free mirror glass composition
- Fast lead times
- Easy installation
- CE IP57, ErP, RoHs, UKCA compliant
- 5-year limited warranty
- Made in China with best quality components


AVAILABLE OPTIONS

- Touch-tunable white + dimming technology
- One-touch energy-saving dimming technology
- Wire-free motion sensor nightlight technology ²
- LED clock technology
- Streaming audio technology ^{2,3}
- Defogger
- CCT: 3,000K,4,500K,6,000
- 10%-100%-brightness dimming
- Forward-phase/triac dimming
- 12VDC power
- Custom sizes

LIGHTING SPECIFICATIONS

- Best-in-class illumination: 853 initial lumens/foot
- Superior color rendering: 90+ CRI
- High-density design: 44 LEDs/foot
- High efficacy: 140 lumens/watt
- Color temperature (CCT): 3,000K,4,500K,6,000K
- LED Lifespan: 52,000-hours
- Extended longevity: replaceable LEDs

DIMENSIONAL DRAWING (Not to scale. Frost and border widths may vary depending on mirror size.)

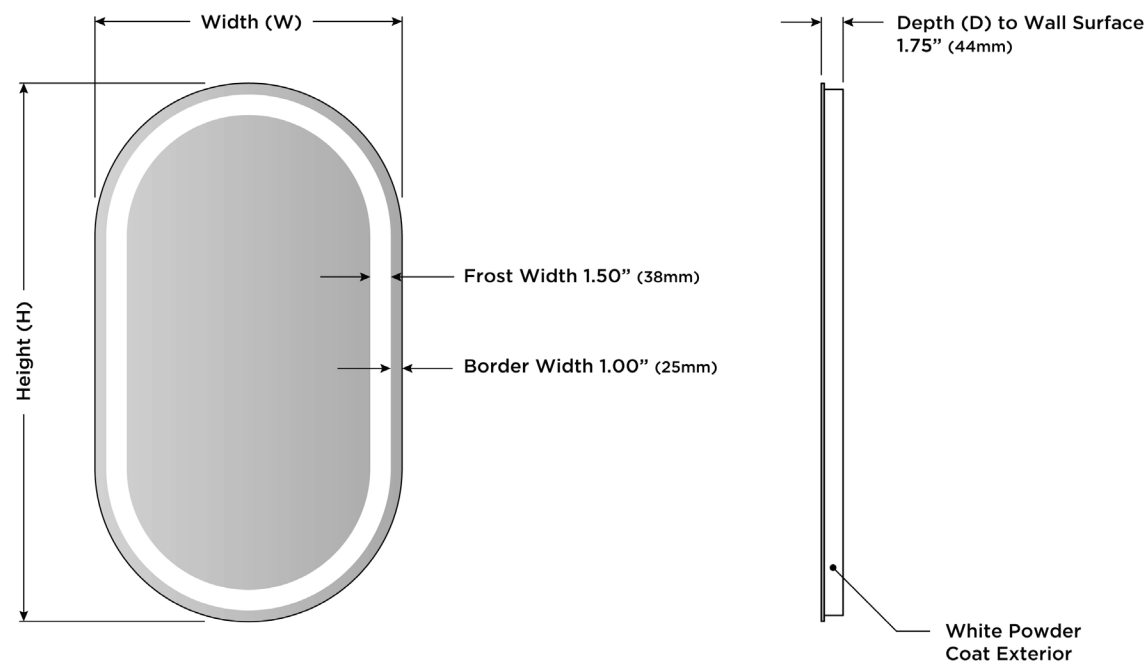

MODELS

Base Model	Dimensions	Initial Lumens/Fixture	Power Requirements
OSIJEK-24.00X36.00	24" W x 36" H x 1.75" D (610mm W x 914mm H x 44mm D)	5,547	OUTPUT 12VDC, 44W
OSIJEK-24.00X42.00	24" W x 42" H x 1.75" D (610mm W x 1,067mm H x 44mm D)	6,401	OUTPUT 12VDC, 51W
OSIJEK-24.00X48.00	24" W x 48" H x 1.75" D (610mm W x 1,219mm H x 44mm D)	7,112	OUTPUT 12VDC, 57W
OSIJEK-24.00X72.00	24" W x 72" H x 1.75" D (610mm W x 1,829mm H x 44mm D)	10,526	OUTPUT 12VDCC, 83W

*Base model number shown only. To specify additional options, contact sales@zhuotaichina.com.

SAFETY & INSTALLATION SPECIFICATIONS

- Entire assembly meets CE, ErP, RoHS, IP57,UKCA international certificates
- International certifications
- Safety-backed mirror
- Connect the hardwire from junction box on mirror's back to wall supply at 220-2240VAC
- Controlled by touch switch on mirror
- Installation wiring may be different on mirrors equipped with additional options
- Fixture can only be hung in the WxH orientation as shown; fixture is not field-interchangeable